

SLIM 715R



System

CPU	Intel® Core™ 3th Gen. i7/i5/i3 Celeron® 3210M processor (2.50G)
Chipset	Intel® QM77
Memory type	Dual Channel DDR3 1333/1600 MHz SDRAM 4/8/16GB

I/O

Serial ports	2x RS232
USB ports	4x USB 3.0
Audio	2 (Mic-in, Line-out phone jack)
Video input	1 VGA / 1 HDMI / 2 DP
Ethernet	2 x RJ45
LAN	2 (10/100/1000Mbps)
PS/2	2 (keyboard/mouse)

Storage Space

HDD	2 x 2,5" SATA3 (Support RAID 0,1) easily accessible design
Mini-PCle	1 x mSATA slot (full-size)

Expansion Slot

PCIe	1 slot PCIe 16x (optional)
------	----------------------------

Environment

Operating temperature	0 ~ 50 °C
Rate humidity	5 to 95% @40 °C - non condensing
Certification	CE

Display

Display type	15" TFT-LCD
Max. resolution	1024 x 768
Max. color	16,7 M
Luminance (cd/m2)	500
View angle (H°/V°)	85 / 85 (H) 85 / 85 (V)
Contrast	1500 : 1

Touch Screen





Type	Resistive zero bezel
Interface	USB
Light transmission	resistive: 80%

Mechanical


Construction	Aluminum front bezel optional INOX 316
IP Rating	Front bezel IP66
Mounting	Panel mounting
Dimension (mm)	425 x 330 x 94.5 425 x 330 x 114.5 (slot PCI)
Net weight	7.4 Kg

Supported Operating System

Windows® XP Embedded Standard 2009
Windows® XP PRO
Windows® 7 Ultimate (32/64bit)
Windows® 7 PRO (32/64bit)
Windows® 7 Embedded (32bit) WS7E/WS7P
Windows® 10 PRO (32/64bit) multilingua
Windows® 10 IoT Enterprise

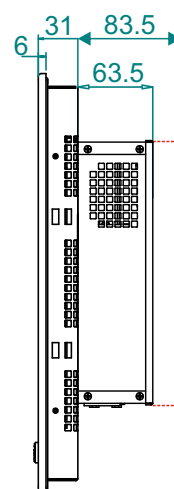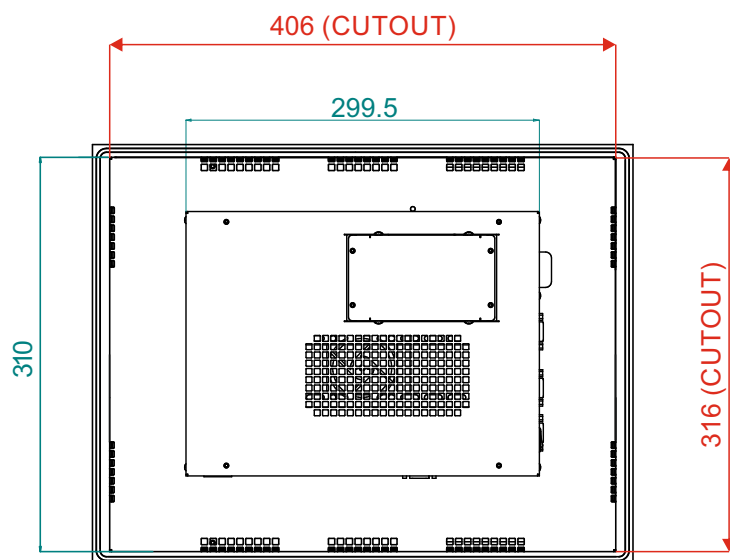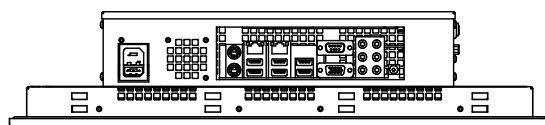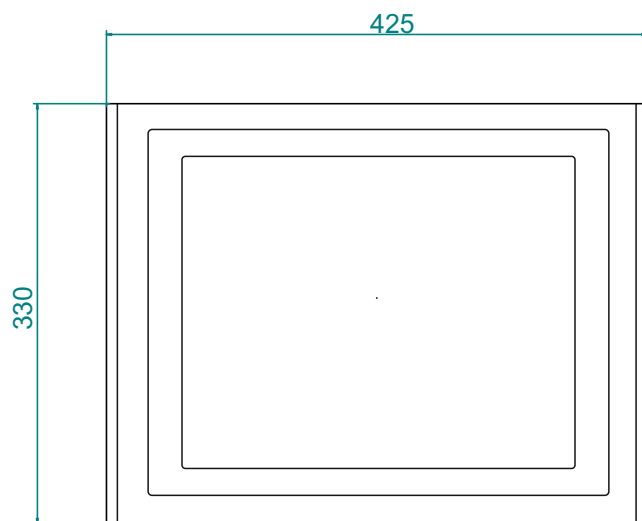

only version
with slot PCI

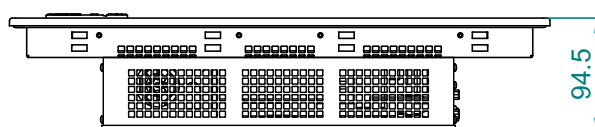

unit: mm

