

SLIM 921



System

- CPU	Intel® 7th & 6th Gen. Core™ i processor (LGA1151) i7-6700TE/i5-6500TE/Pentium® 4400TE
- Chipset	Intel® Q170
- Memory type	Dual Channel DDR4 2133MHz SDRAM MAX 32GB
- Ethernet	GbE LAN1: Intel® i219LM; LAN2: Intel® i211AT

I/O

- Serial ports	1 x RS232, 1 x RS232/422/485
- USB ports	4 USB 3.0 + 2 USB 2.0 (optional)
- Audio	3 (Mic-in, Line-out, Line-in)
- Video input	1 VGA - 1 HDMI - 1 DP
- Ethernet	2 x RJ45
- Power connection	1 x 4 pin DC terminal block 1 x 2 pin remote power switch 2 x LED light for power and HDD indication

Storage Space

- HDD	2 x 2,5" SATA3 (Support RAID 0,1) easily accessible design
- Mini-PCle	1 x mSATA slot (full-size)
- M2	B key for SSD and 3G supported (type: 2242 ,2280mm)

Expansion Slot

-Mini-PCle	1, F/S Mini-PCle slot (with mSATA supported)
-PCle	2 PCle 8X or 3 PCI (optional)

Environment

Operating temperature	0 ~ 50°C
Storage temperature	-30 ~ 70°C
Storage humidity	10 to 90% @ 40 °C - non condensing
Certification	CE

Display

- Display type	21,5" TFT-LCD
- Max. resolution	1920 x 1080
- Max. color	16,7 M
- Luminance (cd/m2)	300
- View angle (H°/V°)	89 / 89 (H) 89 / 89 (V)
- Contrast	5000 : 1

Touch Screen

- Type	Project capacitive
- Interface	USB
- Light transmission	Project capacitive: 90%

Mechanical


- Construction	Aluminum front bezel INOX 316 (optional)
- IP Rating	Front bezel IP65
- Mounting	Panel mounting
- Dimension (mm)	572 x 396 x 121
- Net weight	-

Supported Operating System


- Windows 7 Professional (32/64bit)
- Windows 7 Ultimate (32/64bit)
- Windows 7 Embedded (32/64bit)
- Windows 10 IoT Enterprise (32/64bit)
- Linux

Technical Features




- It can support two different TFT with full HD or HD resolution
--

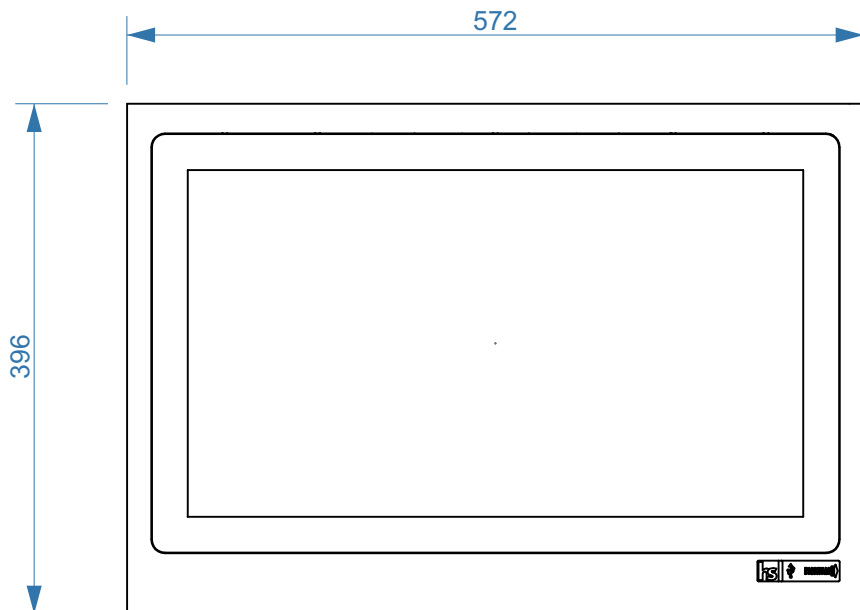


Legenda

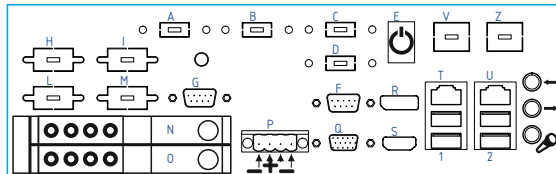

A/B/C/D: USB 2.0 (opt) P: DC INPUT 12-24 V
 E: POWER BUTTON Q: VGA
 F: COM 1 R: DP1++
 G: COM 2 S: HDMI
 H: COM 3 (opt) T: ETH 1
 I: COM 4 (opt) U: ETH 2
 L: COM 5 (opt) V: ETH 3
 M: COM 6 (opt) Z: ETH 4
 N: HD 1 1: USB 3.0 1-2
 O: HD 2 2: USB 3.0 3-4

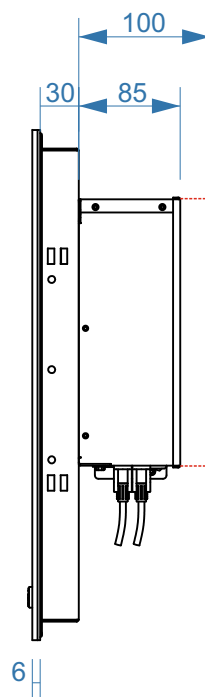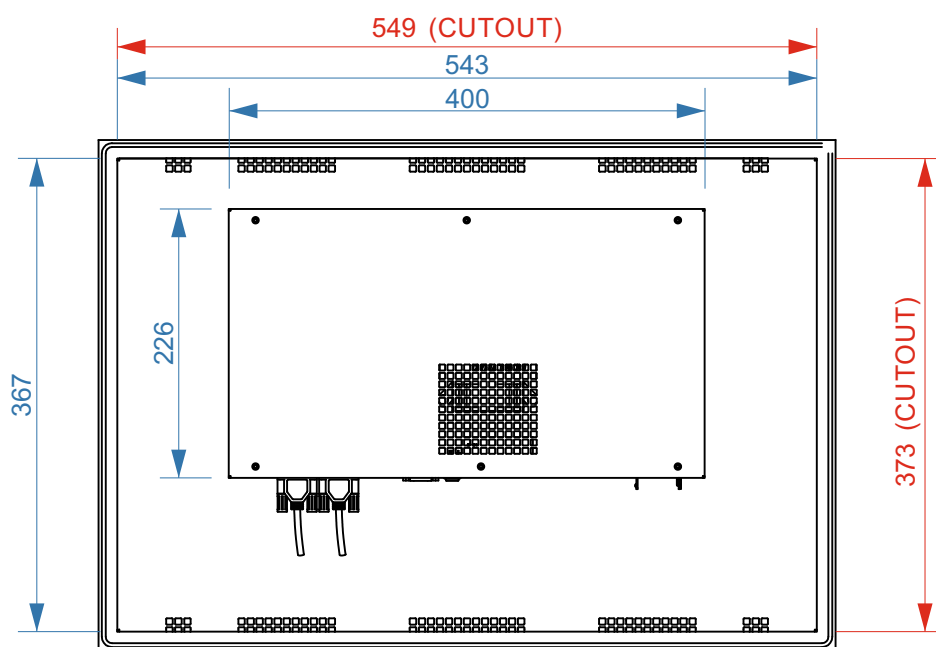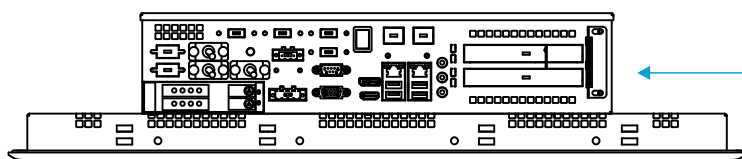

only version
with 3 slots PCI

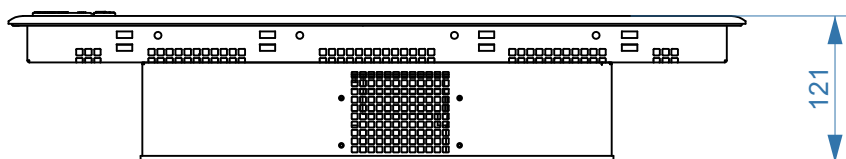

unit: mm

